

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

PATENT ABSTRACTS OF JAPAN

(11)Publication number : **02-267879**

(43)Date of publication of application : **01.11.1990**

(51)Int.Cl.

H01R 13/719

(21)Application number : 01-089326

(71)Applicant : **FUJITSU LTD**

(22)Date of filing : 07.04.1989


(72)Inventor : **TAKAHASHI TOMOYUKI**

(54) CONNECTOR

(57)Abstract:

PURPOSE: To obtain a smaller connector and improved noise signal shut-out characteristics by member cementing a single filter element to a contact with both capacitance and inductance elements provided on the single filter element of the connector.

CONSTITUTION: Each of multiple contacts 1 is made up of a male-side contacting portion 12 which is inserted into its mating side, a terminal portion 12 which is bent in the shape of an 'L' and is connected to a printed circuit board. etc., and a locking portion that extends between them. These contacts are embedded in insulators 31, 32 at a prescribed pitch, and are surrounded by a metallic shell 2. An earth plate 4 is held between the front shell 21 and the rear shell 22 of the shell 2. The earth plate 4 is provided with a metal plate of a specified thickness in which an opening portion 41 is formed that penetrates and holds a filter element 6, 7 attached to each contact, or with a ceramic plate which has a conductor pattern printed and baked on one side of it which includes the inner surface of the penetrating hole 41. The element 6, 7 provides a filter circuit made up of both capacitance and inductance elements.

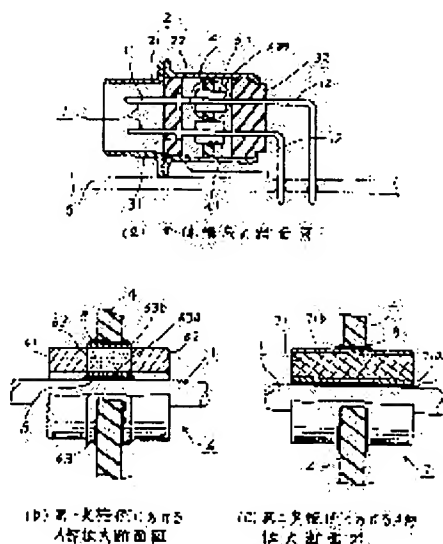

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of

rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office